

INTRAOCULAR LENS


ARTIS[®] Y PL

HYDROPHOBIC ACRYLIC



Micro-incision

Preloaded

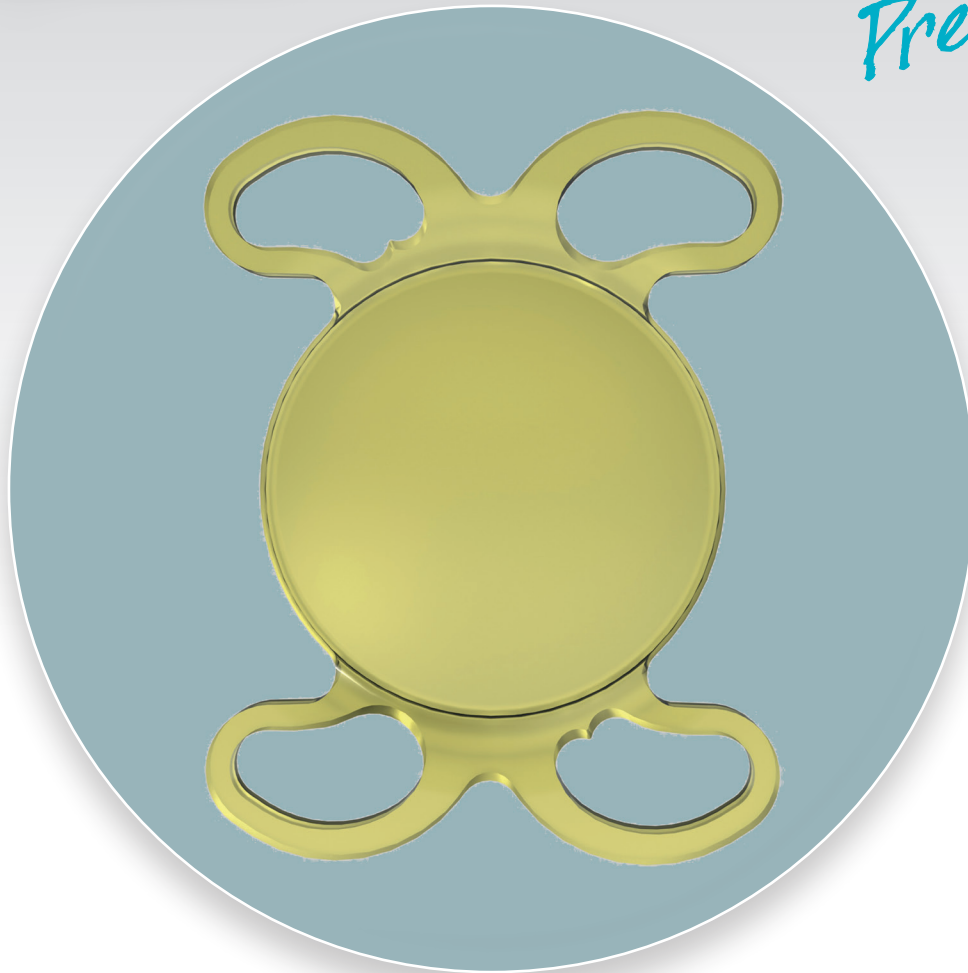

MADE
IN **FRANCE**
CE marked


Intraocular Lenses
Manufacturer

Cristalens

DESIGNATION	TECHNICAL SPECIFICATIONS
Lens type	For implantation in the capsular bag
Optic diameter	6.15 mm (from 0.0D to +9.5D) 6.00 mm (from +10.0D to +25.0D) 5.80 mm (from +25.5D to +35.0D)
Overall diameter	11.00 mm (from 0.0D to +9.5D) 10.79 mm (from +10.0D to +25.0D) 10.50 mm (from +25.5D to +35.0D)
Design	One piece square edge on 360°
Optic design	Aspherical on the posterior surface Compensation of corneal aberrations
Angulation	5°
Material	Hydrophobic acrylic for micro-incision
Dioptric powers	From 0.0D to +35.0D by 0.5D
Estimated A-Constant (SRK-T)	119.3 Ultrasound biometry 119.7 Interference laser biometry
Suggested Anterior Chamber Depth (ACD)	5.77 mm Ultrasound biometry 6.03 mm Interference laser biometry
Refractive index	1.54
Sterilization	Ethylene oxide
Recommended incision size	< 2.0 mm

15/10/2015 DOC_16_PHOBIC



Intraocular Lenses
Manufacturer



Cristalens Industrie

4 rue Louis de Broglie - 22300 Lannion - France
Tel: + 33 (0) 2 96 48 92 92 - Fax: + 33 (0) 2 96 48 97 87

www.cristalens.fr